




RECYFIX®PLUS 100

RECYFIX®PLUS 100, class D 400, Type 01 with ductile iron grating heelsafe, SW 80/6 mm, black, 1,0 m

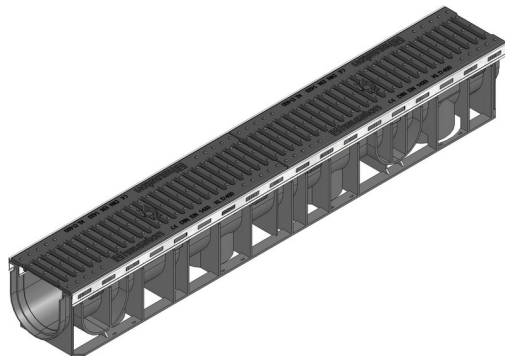

D 400

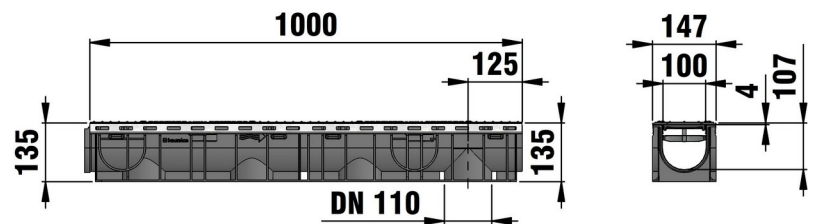

■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Internal channel cross-sect. cm ²	Inlaying depth	Item-no.
1000	147	135	9.362	254.0	92.0	6	40371

■ Product description:

RECYFIX PLUS 100 type 01 - channel made of modified PP, with integrated metal profile for the grating support, according to EN 1433, with vertical connection possibility DN/OD 110, with ductile iron grating made of spheroidal ductile iron GJS 500-7, slot width 80/6 mm, black, locked, with horizontal thrust resistance and locking device, loading capacity from A 15 - D 400, L/W/H 1000x147x135 mm, item no. 40371

■ Material:

- **Channel body:** recycled, modified Polypropylene
- **Bolts:** Steel black galvanised
- **Locking handle:** RECYFIX Material (recycled PA)
- **Angle housing:** strip galvanized steel
- **Grating:** Ductile iron GJS 500-7

■ Type acc. DIN EN 1433:

M

■ Application areas:

- Architecture and Design
- Facades
- Flat roofs, terraces, balconies
- Public places
- Communal facilities
- Parking lots
- Parks and gardens
- Home and garden



The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!

